


Technical data shock pad

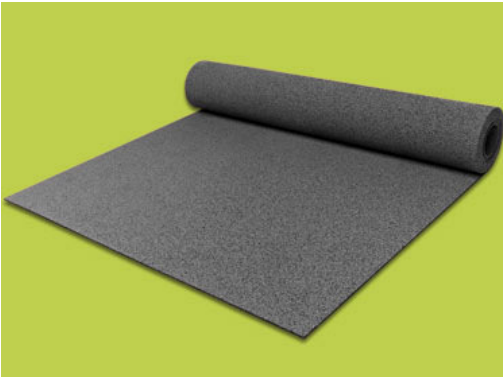

Material:

fine rubber granules and recycled rubber fibres bonded with polyurethane elastomer

Density: approx. 770 kg/m³

Material thickness: thickness: 4 mm (± 0.3 mm)

Width: 1,500 mm (± 1.5 % mm)

Colour: black

Tensile strength: approx. 0.6 MPa, DIN 53571

Elongation at break: approx. 60 %, DIN 53571